


Application

Assembly can be of the reduced pressure principle or of the double check type. The 3/4" & 1" includes a Model 975XLV or 950XLV backflow preventer and either a "Y" strainer, in-line check valve or pressure reducing valve in any combination. The 1 1/4" - 2" includes a Model 975XLSEU or 950XLSEU backflow preventer with union ball valves and either a "Y" strainer, in-line check valve or pressure reducing valve in any combination



Model 975XLVSR


Standards Compliance

- Backflow Preventer is approved by ASSE® Listed 1013 (975XLV and 975XLSEU), ASSE® Listed 1015 (950XLV), IAPMO® Listed Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California (Model 975XLV and 975XLSEU)
- Model NR3 Regulator is ASSE® Listed 1003, IAPMO® Listed, CSA® Certified

Features

Sizes: 3/4", 1", 1 1/4", 1 1/2", 2"

Dimensions & Weights (do not include pkg.)

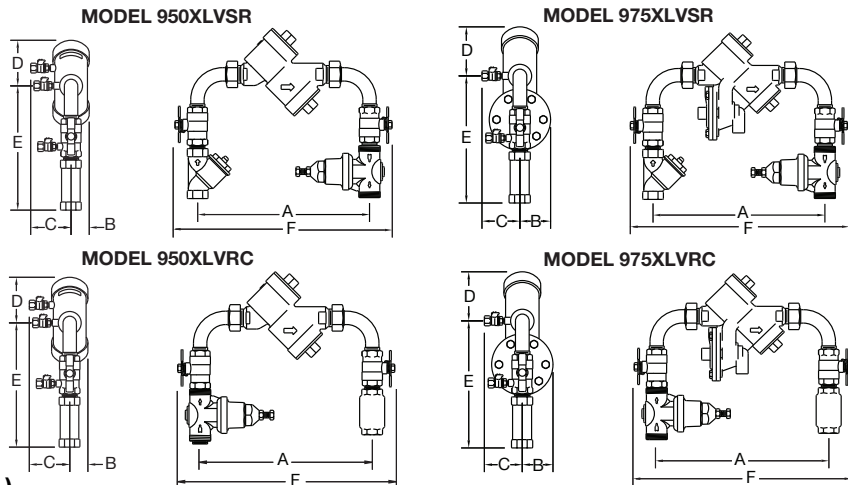

950XL PRE-SET		DIMENSIONS (approximate)																WEIGHT	
		A		B		C		D		E NR3		E YB		E 40XL		F			
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
3/4	20	11 1/2	292	1 5/16	33	3	76	3 1/2	89	8 3/4	222	8 3/4	222	8 1/2	216	14 3/4	337	15	6.8
1	25	11 1/2	292	1 5/16	33	3	76	3 1/2	89	9 1/2	241	10	254	8 3/4	222	15 1/2	343	19	8.6
1 1/4	32	12	325	2	51	3 1/2	89	4 1/2	114	11 1/4	286	11	279	8 7/8	225	17	371	35	15.9
1 1/2	40	13 1/16	332	2	51	3 1/2	89	4 1/2	114	13 7/8	352	12 3/4	324	11	287	19 1/4	405	40	18.2
2	50	14 1/16	357	2	51	3 1/2	89	4 1/2	114	14 7/8	376	14	376	13	344	21 1/16	456	52	23.6

975XL PRE-SET		DIMENSIONS (approximate)																WEIGHT	
		A		B		C		D		E NR3		E YB		E 40XL		F			
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
3/4	20	12 1/4	311	2 1/8	54	3	76	3 1/2	89	8 3/4	222	8 3/4	222	8 1/2	216	15 3/4	356	18	8.2
1	25	12 1/4	311	2 1/8	54	3	76	3 1/2	89	9 1/2	241	10	254	8 3/4	222	16 1/4	362	22	10
1 1/4	32	13 1/2	343	2 3/4	70	3 1/2	89	5	127	11 1/4	286	11	279	8 7/8	225	18 1/2	410	41	18.6
1 1/2	40	13 1/2	343	2 3/4	70	3 1/2	89	5	127	13 7/8	352	12 3/4	324	11 1/2	292	19 11/16	416	46	20.9
2	50	14 5/16	364	2 3/4	70	3 1/2	89	5	127	14 7/8	376	14 13/16	376	13	344	21 5/16	462	58	26.3

Model 950XLVSR / 975XLVSR

Same as Models 950XLV and 975XLV except with Model YB "Y" Strainer on inlet and Model NR3 Regulator on outlet.

Model 950XLVSC / 975XLVSC

Same as Models 950XLV and 975XLV except with Model YB "Y" Strainer on inlet and Model 40XL In-line Check Valve on outlet.

Model 950XLVRS / 975XLVRS

Same as Models 950XLV and 975XLV except with Model NR3 Regulator on inlet and Model YB "Y" Strainer on outlet.

Model 950XLVRC / 975XLVRC

Same as Models 950XLV and 975XLV except with Model NR3 Regulator on inlet and Model 40XL In-line Check Valve on outlet.

Model 950XLVCS / 975XLVCS

Same as Models 950XLV and 975XLV except with Model 40XL In-line Check Valve on inlet and Model YB "Y" Strainer on outlet.

Model 950XLVCR / 975XLVCR

Same as Models 950XLV and 975XLV except with Model 40XL In-line Check Valve on inlet and Model NR3 Regulator on outlet.